

STURGO[®] COMPACT ELECTRIC PALLET JACK 2T Li

LITHIUM
POWER



WHY?

IF YOU'RE LOOKING TO ADVANCE YOUR WORKPLACE, REDUCE OPERATOR STRAIN AND IMPROVE EFFICIENCY, THIS CUTTING-EDGE PALLET JACK PROVIDES ECONOMIC YET POWERFUL PERFORMANCE

- Impressive agility and strength
- Prevent costly accidents from manually lifting, lowering and carrying
- Save time and manpower with powerful 2 metric tonne capacity
- Simplified design to provide everything you need and nothing you don't
- Good for the environment - no nasty fuel emissions
- Quieter than combustion powered forklifts

KEY FEATURES

- Compact body for easy storage
- No unnecessary 'gimmicks'
- Stylish heavy duty design
- Powerful performance
- Tough long-lasting engineering
- Solid body frame
- Ergonomic handle with new tiller head design and intuitive digital display
- Unique easy-exchange 48V Lithium battery
- Built in battery charger
- LED light assists with visibility in dark corners
- No hassle maintenance; simple parts replacement
- Affordable price and excellent investment
- Electric drive / electric lift



Ergonomic handle with digital display



Removable Lithium battery



Heavy duty load rollers



LED light


TECHNICAL BRIEF

- Capacity 2000kg
- Battery voltage/rated capacity 48V/30Ah (Li)
- Electro-magnetic brake



STURGO[®] COMPACT ELECTRIC PALLET JACK 2T Li

THE STURGO[®] LIFT RANGE

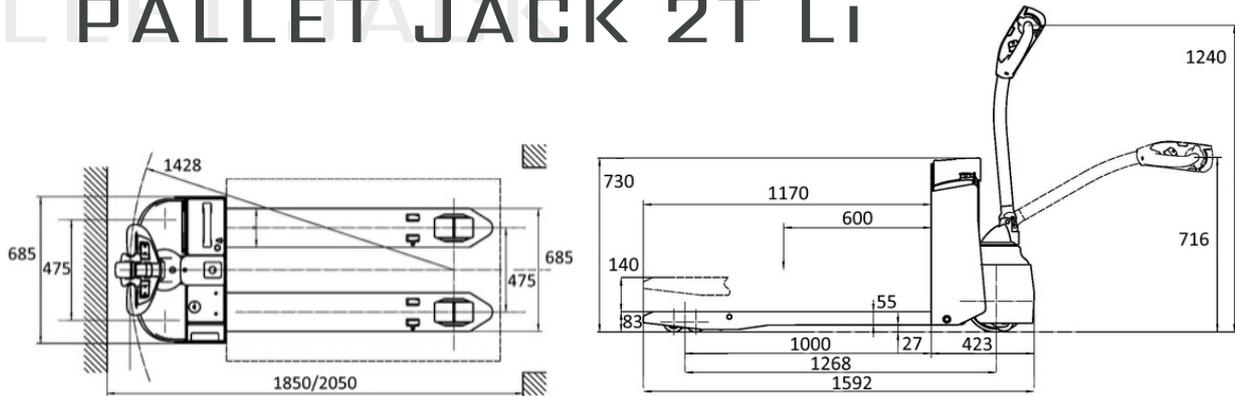

General

Model	11740314 / WPL201
Capacity	2000kg
Load Centre	600mm
Lifting Type	Electric
Operating Type	Walkie

Wheels

Material	PU
Wheel Base	1268mm
Quantity (driving/balance/bearing)	1/2/4
Bearing Wheel	2 x Ø82 x 85 mm / Ø82 x 115 mm
Driving Wheel	Ø250 x 102 mm
Balance Wheel	Ø74 x 48 mm

Dimensions

Min. Fork Height	82.5mm
Max. Fork Height	140mm
Overall Fork Width	685mm
Fork Dimensions (length/width/depth)	1170/170/55 mm
Overall Dimensions (length/width/height)	1592/685/1240 mm
Ground Clearance (wheelbase centre)	27mm
Min. Turning Radius	1428mm

Performance

Travel Speed (laden/unladen)	5/5.5 km/h
Lifting Speed (laden/unladen)	23/29 mm/s
Lowering Speed (laden/unladen)	37/27 mm/s
Fast/Slow Adjustment Function	Yes
Gradeability (laden/unladen)	8/16%

Electrical

Drive Mode	DC
Drive Motor rating S2 60min	0.75Kw
Lift Motor rating at S3 15%	0.84Kw
Battery Capacity	1 x 48V/30Ah
Charger	48V 15A

Weights

Battery Weight	13kg
Service Weight (includes battery)	250kg