

Forklift Jib Attachments



11640063



11640170

Usage

Smart lifting solution where the forklift does all the work. Jib attachments come in a range of sizes and lengths for all industrial purposes.

Features & Benefits

- Increase productivity and profitability by reducing damages to materials during use, storage and movement
- Available in a range of sizes and load capacities
- Designed to provide optimum safety for the forklift operator
- Ideal for any 'lift by hook' applications
- Safety Swivel hooks fitted as standard
- Zinc finish for durability
- Certified to Australian Standards and supplied with instructions, certification and risk assessment
- Safety chains secure the jib to the forklift
- Extension jibs operate by the removal of locking pins

** Note that the towing of trailers by a forklift fitted with a tow jib can impose overturning forces on the forklift and additional force on the mast and braking system. The load being towed must be no greater than 25% of the mass of the forklift. Towing should be carried out in a slow, smooth and controlled manner and on level ground. Sharp turning must be avoided at all time to prevent jack-knifing of the trailer. **

Specifications

Model 11640060 - Slip On Jib

Working Load Limit: 4750kg

Load Centre: 780mm

Pocket Sizes: 185 x 75mm

Pocket Centres: 250mm

Horizontal Centre of Gravity: 700mm

Vertical Centre of Gravity: 165mm

Unit Weight: 130kg

Jib Length Closed: 1.3m

Jib Length Extended: 1.96m


Forklift Jib Attachments



11640026



11640143

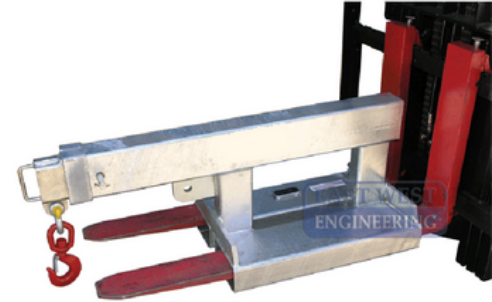

11640060

Specifications

Model 11640026 - Slip On Jib

Working Load Limit: 2000kg
Load Centre: 1000mm
Pocket Sizes: 140 x 65mm
Pocket Centres: 250mm
Unit Weight: 37kg
Features 2 hook positions 500mm apart

Model 11640203 - Tow Jib

Working Load Limit: 2000kg
Load Centre: 250mm
Pocket Sizes: 140 x 65mm
Pocket Centres: 250mm
Horizontal Centre of Gravity: 655mm
Vertical Centre of Gravity: 300mm
Unit Weight: 45kg

Model 11640170 - Tilt Jib Short

Working Load Limit: 2500kg
Load Centre: 825mm
Pocket Sizes: 165 x 65mm
Pocket Centres: 337mm
Horizontal Centre of Gravity: 650mm
Vertical Centre of Gravity: 300mm
Unit Weight: 130kg

Model 11640171 - Tilt Jib Long

Working Load Limit: 4750kg
Load Centre: 1000mm
Pocket Sizes: 185 x 75mm
Pocket Centres: 370mm
Horizontal Centre of Gravity: 985mm
Vertical Centre of Gravity: 275mm
Unit Weight: 240kg


Model 11640063 - Tilt Jib Long

Working Load Limit: 2500kg
Load Centre: 1005mm
Pocket Sizes: 165 x 65mm
Pocket Centres: 337mm
Horizontal Centre of Gravity: 1010mm
Vertical Centre of Gravity: 225mm
Unit Weight: 180kg

Model 11640143 - Slip On Jib

Working Load Limit: 2500kg
Load Centre: 790mm
Pocket Sizes: 185 x 65mm
Pocket Centres: 275mm
Horizontal Centre of Gravity: 630mm
Vertical Centre of Gravity: 135mm
Unit Weight: 100kg

Forklift Jib Attachments

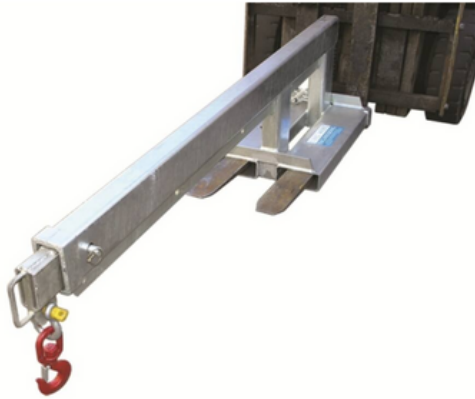

11640046

Specifications

Model 11640149 - Fixed Jib Short

Working Load Limit: 10,000kg
Load Centre: 930mm
Pocket Sizes: 230 x 110mm
Pocket Centres: 935mm
Horizontal Centre of Gravity: 740mm
Vertical Centre of Gravity: 100mm
Unit Weight: 400kg

Model 11640044 - Fixed Jib Long

Working Load Limit: 4750kg
Load Centre: 935mm
Pocket Sizes: 185 x 75mm
Pocket Centres: 935mm
Horizontal Centre of Gravity: 1210mm
Vertical Centre of Gravity: 200mm
Unit Weight: 170kg

Model 11640046 - Fixed Jib Long

Working Load Limit: 2500kg
Load Centre: 950mm
Pocket Sizes: 185 x 65mm
Pocket Centres: 950mm
Horizontal Centre of Gravity: 1160mm
Vertical Centre of Gravity: 185mm
Unit Weight: 135kg



11640204

Model 11640137- Fixed Jib Long

Working Load Limit: 10,000kg
Load Centre: 920mm
Pocket Sizes: 230 x 110mm
Pocket Centres: 875mm
Horizontal Centre of Gravity: 1200mm
Vertical Centre of Gravity: 100mm
Unit Weight: 515kg

Model 11640205 - Extension Jib

Working Load Limit: 7500kg
Load Centre: 1275mm
Pocket Sizes: 230 x 110mm
Pocket Centres: 875mm
Horizontal Centre of Gravity: 680mm
Vertical Centre of Gravity: 105mm
Unit Weight: 390kg

Model 11640204 - Extension Jib

Working Load Limit: 3500kg
Load Centre: 800mm
Pocket Sizes: 185 x 65mm
Pocket Centres: 300mm
Horizontal Centre of Gravity: 580mm
Vertical Centre of Gravity: 110mm
Unit Weight: 115kg